
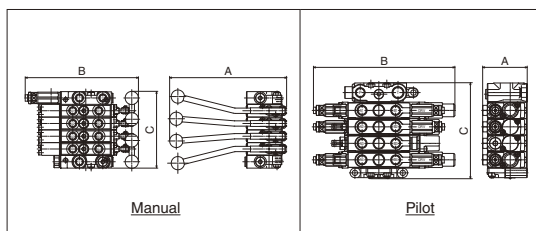


NSC/SC/BCV Series (Manual/hydraulic pilot operation)



[Main Application]

- Control valves for truck-mounted cranes, agricultural machinery, various special purpose vehicles, etc.

[Features]

- Combination of 1 to 10 series is possible.
- Parallel and tandem circuit configurations are possible

■ Specification

		NSC10	SC3A	BCV35
Structure		Sectional Type	Sectional Type	Sectional Type
Number of Pumps		1	1	1
Max. Pressure	MPa	20.6	20.6	24.5
Rated Flow Rate	L/min	15	50	35
Spool Operation	Manual	✓	✓	✓
	Pilot	✓	-	✓
	Solenoid	-	-	-

✓: Available

■ Optional Functions

		NSC10	SC3A	BCV35
Pump Unload		✓*	✓*	-
Manual Lever		✓	✓	-
Carry-over		✓	✓	✓
Accessory Valve		✓	✓*	✓
Detent		✓*	✓*	✓*
Circuit Type	Parallel	✓	✓	✓
	Tandem	✓*	✓*	✓
	Series	-	-	-

*Depends on circuit structure ✓: Available

■ Outline Dimensions

		NSC10	SC3A	BCV35
A	mm	221*	246*	84
B	mm	213	220	266
C	mm	Depends on number of blocks	Depends on number of blocks	Depends on number of blocks
Bank Width	mm	24	34	31

*Including lever