
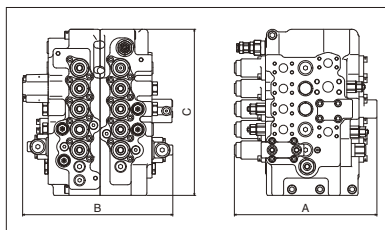


UN (UK) Series



[Main Application]

- Main control valve for medium and large construction machinery

[Features]

- High flow rate and minimal pressure drop are realized by optimizing the internal passage.
- Playback function, priority function, and other functions are available to meet customer needs

■ Specification

		UN22	UN28	UN32	UK36
Structure		2 Blocks	2 Blocks	2 Blocks	3 Blocks
Number of Pumps		2	2	2	2
Max. Pressure	MPa	36	36	36	35
Rated Flow Rate	L/min	160×2	260×2	330×2	540×2
Spool Operation	Manual	-	-	-	-
	Pilot	✓	✓	✓	✓
	Solenoid	-	-	-	-
Standard Number of Blocks		9	9	9	9
Additional Blocks		✓	✓	-	-
Applicable Excavator Weight (ref.)	ton	11~16	16~24	24~36	36~

✓ : Available

■ Optional Functions

		UN22	UN28	UN32	UK36
Priority	Boom	✓	✓	✓	✓
	Swing	✓	✓	✓	✓
Travel	Straight	✓	✓	✓	✓
	Boom	✓	✓	✓	✓
Regeneration	Arm	✓	✓	✓	✓
	Pressure Rise	✓	✓	✓	✓
Holding Valve	Boom	✓	✓	✓	✓
	Arm	✓	✓	✓	✓
Signal Circuit	Auto Idling	✓	✓	✓	✓
	Travel Independent	✓	✓	✓	✓

✓ : Available

■ Outline Dimensions

		UN22	UN28	UN32	UK36
A	mm	369	381.5	431	504.5
B	mm	386	431	454	656
C	mm	432.5	470.5	502	588