
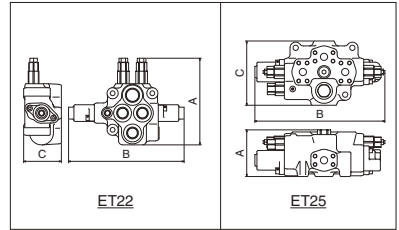


## ET Series



### [Main Application]

- Optional control valve for medium-sized construction machinery

### [Features]

- Ideal as an additional optional control valve for bulldozers, etc.
- Compact monoblocking with each port
- Pressure-resistant performance in line with that of the main control valve

### ■ Specification

		ET22	ET25
Structure		Mono-block Type	Mono-block Type
Number of Pumps		1	1
Max. Pressure	MPa	34.3	34.3
Rated Flow Rate	L/min	160	260
Spool Operation	Manual	-	-
	Pilot	✓	✓
	Solenoid	-	-
Standard Number of Blocks		1	1
Additional Blocks		-	-
Applicable Excavator Weight (ref.)	ton	11~16	16~24

✓ : Available

### ■ Optional Functions

	ET22	ET25
Port Relief Valve	✓	✓
Signal Circuit	✓	-
Additional Pump	-	✓
Carry-over	-	✓

✓ : Available

### ■ Outline Dimensions

		ET22	ET25
A	mm	218.2	123.5
B	mm	291	344
C	mm	96	170